




5X7.0J RIMS 10X7.0J
221 kPa/ 32 PSI COLD | AT 241 kPa/ 35 PSI

VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR
VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF
MANUFACTURE SHOWN ABOVE.

1FTDF1720VNC40950
TRUCK

F01
T09

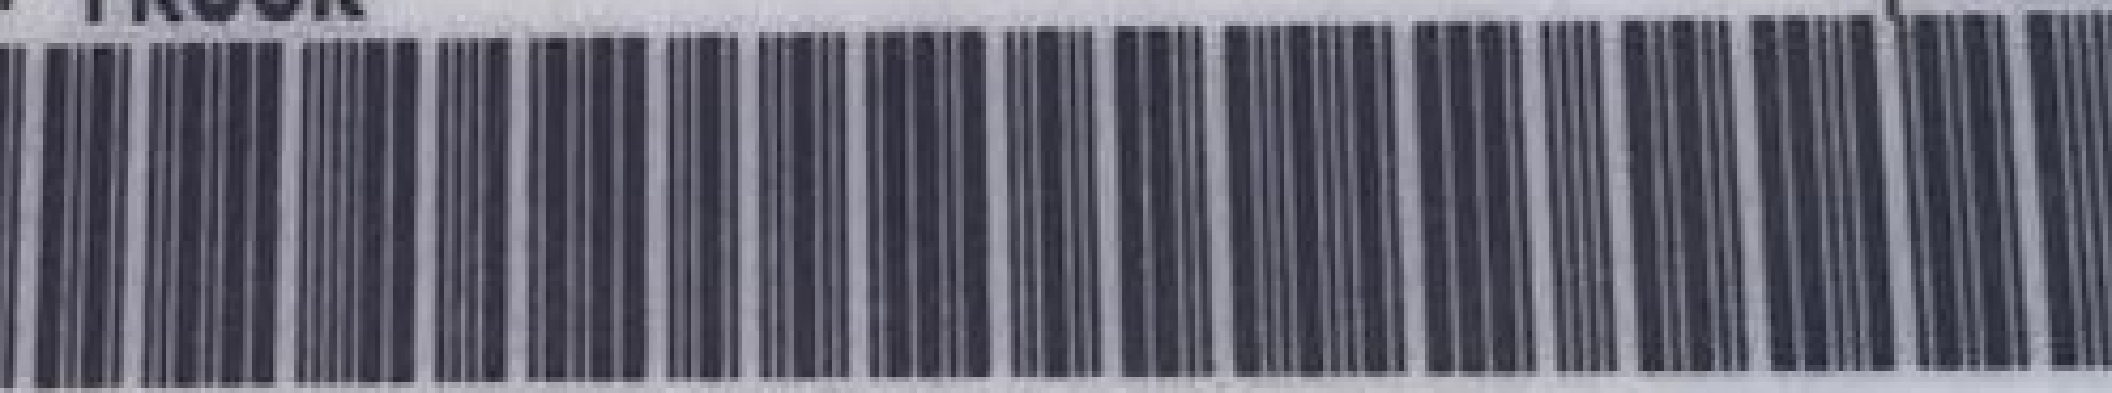

PNT: YZ UA IRC: 23 | DSO:

BRK | INT | TR | TP/PS | R | AXLE | TR | SPR
B C2 2/ 9 18 M LF

LTC REF: 15201-72